


Universal Service Tech Kit

Leak Detection System Diagnostics from Tank Pressure to Domestic Water Column.

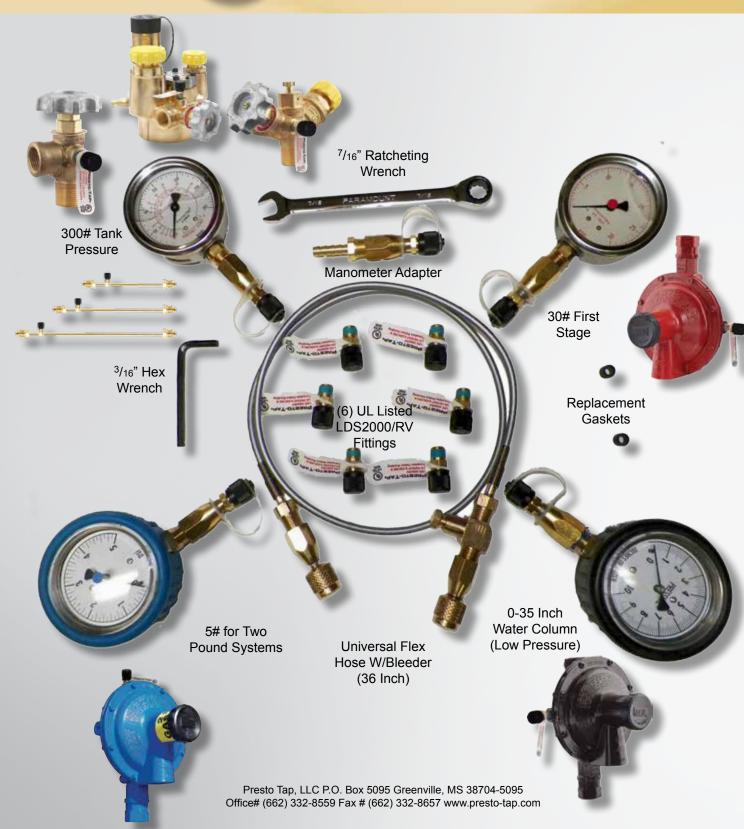

- **6800 KGW/Adapter** 300# Ambient Temperature gauge used for Leak Testing at tank pressure with Presto Tap® pigtails, TPF fittings and RegO® "Ready to Go" series valves.
- **PT30 KGW/Adapter** 30# Gauge for determining first stage regulator lock up and flow along with leak testing.
- PT-5# KG W/Adapter 5# gauge for determining lock up and flow on Two Pound Systems.
- PT-OZ KGW/Adapter 0-35 inch water column gauge formeasuring second stage regulator lock up and flow along with low pressure leak testing.
- MHA Kit Adapter used to facilitate use of master manometers (watermanometer), heli gauges.
- 3/16"Allen/Hex Key for plug removal in regulators.
- Universal FlexHose 36" flexible hose with gauge bleeder and adapters utilized to universally connect with all gauging equipment above and Presto Tap LDS2000/RV product installed in the system.
- LDS2000/RV (6)UL Listed fittings with #54 orifice legal installed at any pointin the system.
- **Kit Bag** 12" Tool Denier Nylon Tool bag with 8 outer and 15 inner pockets